


Maßstab:
H = 1 : 100
(L = 1 : 250)

* verkürzte Ausgabe


1: RKB_VORTHBACH_11

30 [müNN]

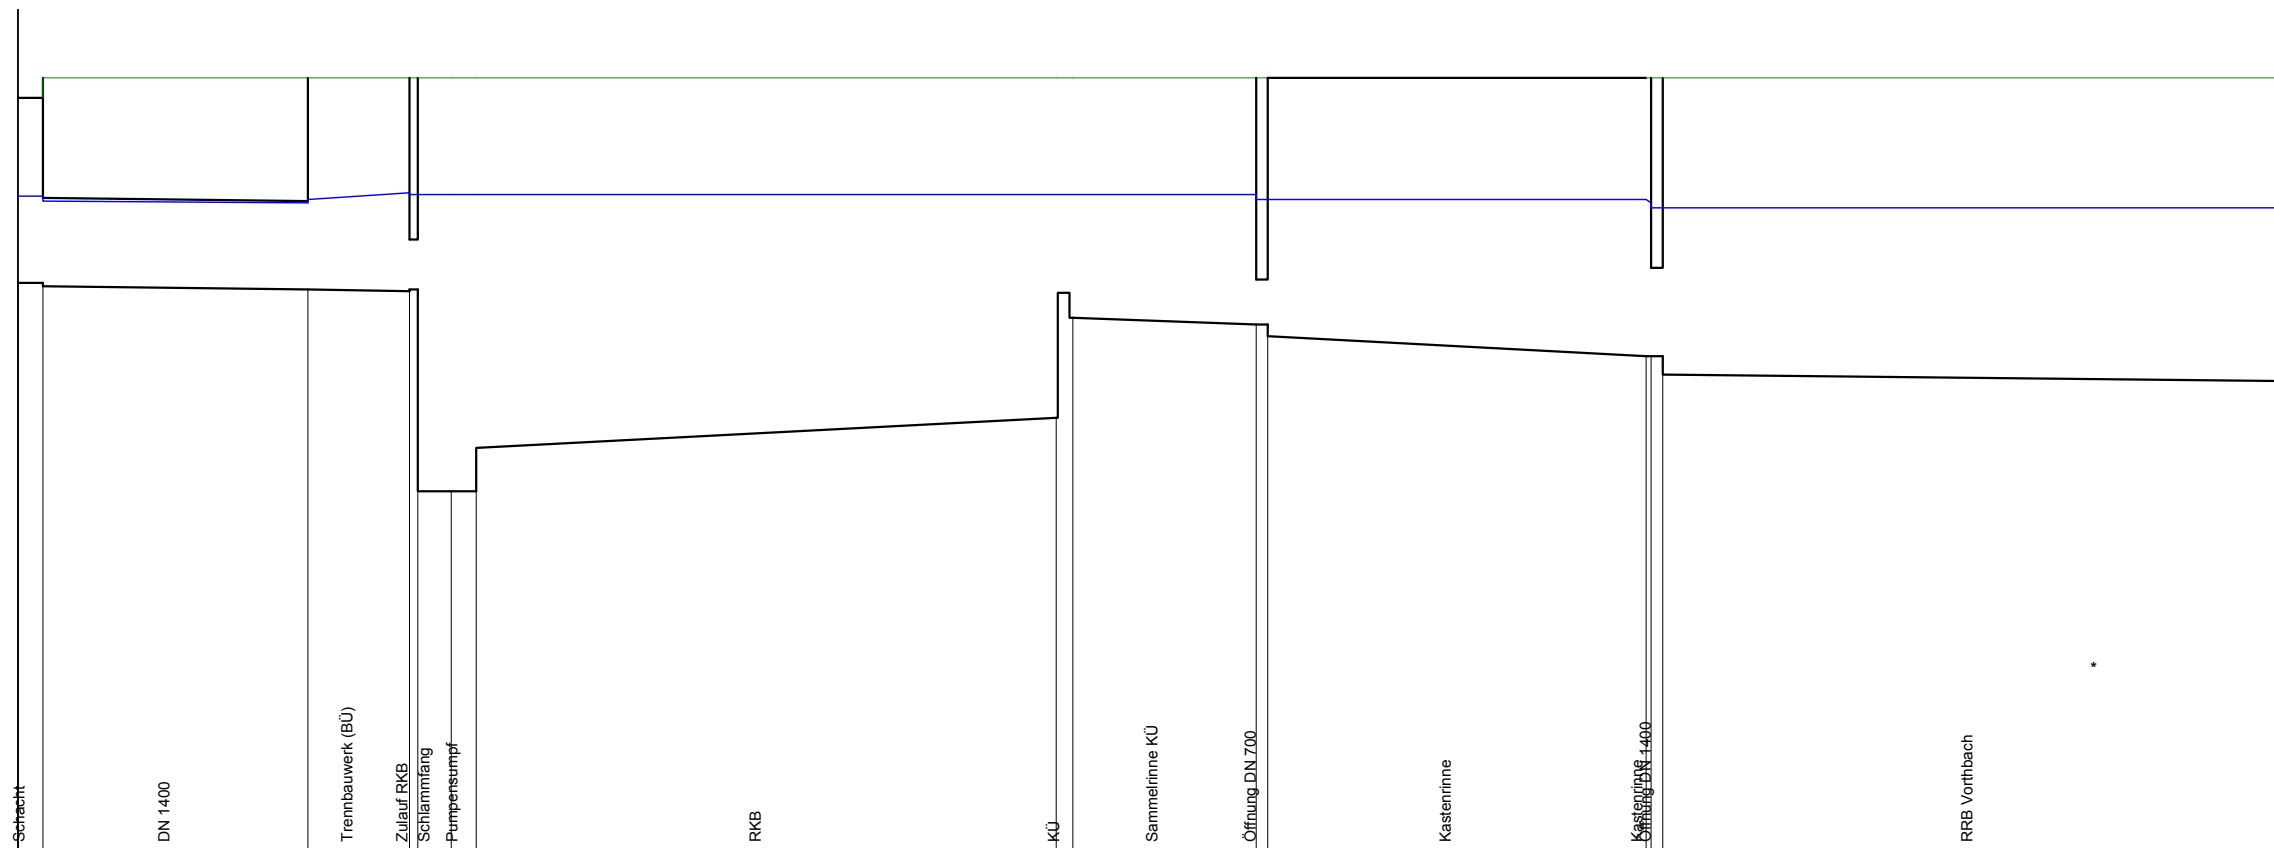

Elementbezeichnung	Q_ZU	D01	V01	D03	B08	B09	G02	U_001	S03	D_700	D70	Z01	D90	B01
Element - Länge [m]	1.00	10.52	4.00	0.35	1.35	1.00	23.00	0.00	7.30	0.45	15.00	0.00	0.45	31.60*
Länge bis Elem. [m]	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
WSP 1 [müNN]	40.42	40.42	40.34	40.33	40.38	40.48	40.45	40.45	40.45	40.37	40.37	40.38	40.33	40.25
Profilhöhe [m]	2.95	2.95	1.40	1.40	3.35	3.38	0.80	0.80	6.55	6.55	17.2	17.2	18.2	18.2
Gelände [müNN]	42.00	42.00	42.30	42.30	42.30	42.30	42.30	42.30	42.30	42.30	42.30	42.30	42.30	42.30
Geschwindigkeit [m/s]	0.968	1.569		0.651	0.012	0.012	0.016	0.036		1.071	0.189		1.545	0.028
max. Durchfluss [m³/s]	2.378	2.378		0.412	0.412	0.412	0.412	0.412		0.412	0.412		2.378	2.378
Sohle [müNN]	39.05	39.05	38.95	38.95	38.93	38.95	35.75	35.75	35.75	35.75	36.90	36.90	38.90	38.90

Planung:



WEBER - INGENIEURE GMBH
 Bauschlotter Str. 62 75177 Pforzheim
 Tel. 07231/583-0 Fax. 07231/583-100
 Kruppstraße 94 (H1) 45145 Essen
 Tel. 0201/43987-86 Fax. 0201/43987-88

RKB Vorthbach
 Hydr. Längsschnitt 1/2 Q = 2.378 l/s

U18.1.2.3 Blatt Nr. 17